


STANLEY®

LED PANEL LIGHT 2x2

SXIMP2X2-01-CCT

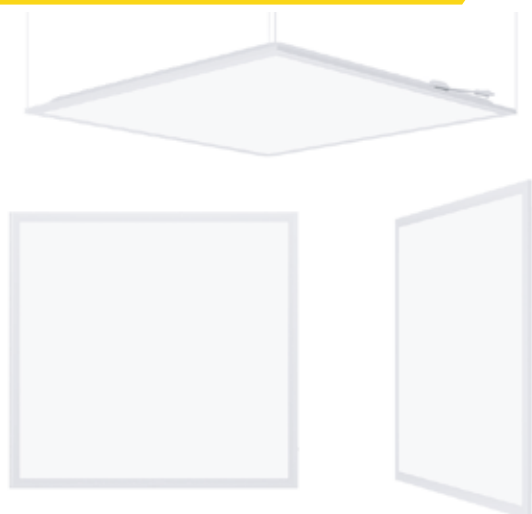

Backlit Panel Certified, with high uniform lighting performance. CCT selectable switch.

FEATURES

- Backlit design without LGP, No risk of yellowing.
- THD>20%
- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



Multi Color Temperature (CCT)



Easy Installation



Save Money



Life Span 50,000 H

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6000K
CCT Switchable	YES
Luminous Flux	4100, 4700, 4500Lm
Type of Distribution	Direct Symmetrical
Beam Angle	120°
Efficiency	117Lm/W
Life Span	50 000 Hrs



PHYSICAL DATA

Finish	White
Protection Level - IP	IP20
Dimensions (LxWxH)	595x595x34mm
Type of Installation	Recessed or Pendant
Body Frame	Aluminium
Optical Material	Diffuser PS
Operation Temperature	00°C to +40°C


ELECTRICAL DATA

Input Power	40W
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO


DIMENSIONS





This panel can be installed in two different ways: pendant or recessed.



(CCT) Color Temperature Switch



LUMINOUS INTENSITY DISTRIBUTION

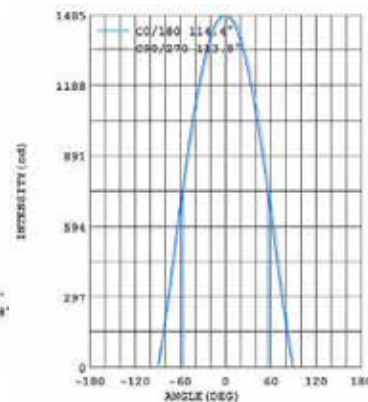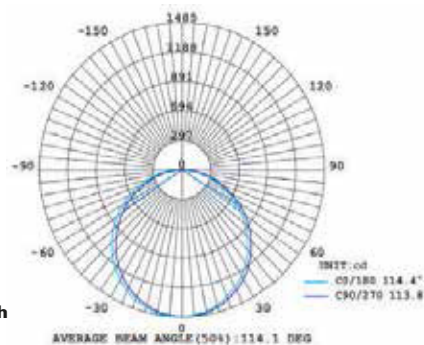

THE MEASURE OF A PRO™