

# STANLEY

## LED PANEL LIGHT 1x4

### SXIMP1X4-01-CCT

Backlit Panel Certified, with high uniform lighting performance. CCT selectable Switch.

#### FEATURES

- Backlit design without LGP, No risk of yellowing.
- Energy efficiency: THD>20%
- No UV emissions
- High light uniformity
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

#### APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas

Indoor



LED



Life Span  
50,000 H



Multi Color  
Temperature  
(CCT)



Easy  
Installation



Save Money

#### OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6000K
CCT Switchable	YES
Luminous Flux	4000,4700,4450 Lm
Type of Distribution	Direct Symmetrical
Beam Angle	120°
Efficiency	117 Lm/W
Life Span	50 000 Hrs



#### PHYSICAL DATA

Finish	White
Protection Level - IP	IP20
Dimensions (LxWxH)	295x1195x34 mm
Type of Installation	Recessed or Pendant
Body Frame	Aluminium
Optical Material	Diffuser PS
Operation Temperature	0°C to +40°C

#### ELECTRICAL DATA




Input Power	40W
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

#### DIMENSIONS

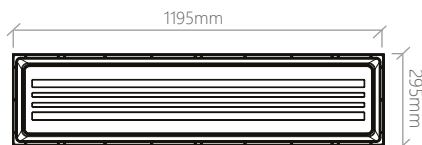


This panel can be installed in two different ways: Pendant or recessed.

#### LUMINOUS INTENSITY DISTRIBUTION

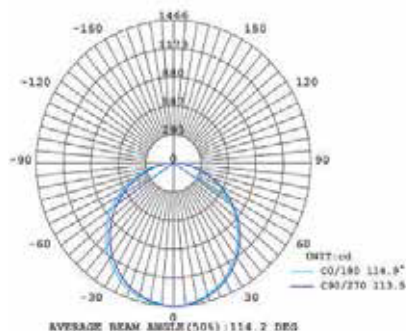

(CCT) Color Temperature Switch



**THE MEASURE OF A PRO™**