

STANLEY

LED SURFACE PANEL LIGHT

SXIM-P2X4-01-CCT

Backlit Panel Certified, with high uniform lighting performance. CCT selectable switch.



FEATURES

- Backlit design without LGP, No risk of yellowing.
- Energy efficiency
- THD>20%
- No UV emissions
- High uniform lighting
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas





LED



OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K,4000K, 6000K	Finish	White	Input Power	60W
CCT Switchable	YES	Protection Level - IP	IP20	Operating Voltage	120-277 V
Luminous Flux	6600 ,7400,7000Lm	Dimensions (LxWxH)	1195x595x34mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Pendant	Power Rating	>0.90
Beam Angle	120°	Body Frame	Aluminium	CRI	80
Efficiency	117 Lm / W	Optical Material	Diffuser PS	Dimmable	NO
Life Span	50 000 Hrs	Operation Temperature	0°C to +40°C		


DIMENSIONS

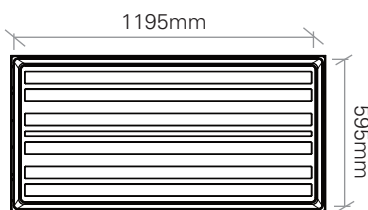



This panel can be installed in two different ways: pendant or recessed.



(CCT) Color Temperature Switch



LUMINOUS INTENSITY DISTRIBUTION

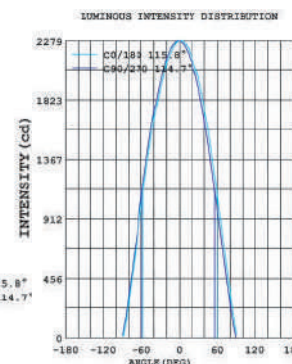

THE MEASURE OF A PRO™