

# STANLEY®

## LED FLOODLIGHT SOLAR

### SXIMSFL01



Outdoor

LED luminaire for street and outdoor lighting, modern and compact design, uniform light projection, high efficiency, long life and easy installation, reduces energy consumption and maintenance costs.

#### FEATURES

- Heavy Duty Die Cast aluminum housing with ample heat sinking.
- LED fixture with bracket can adjustable in 0-270 degrees.
- Control Remote Included
- Slipfit Arm included
- IP65/IK08.
- Long Lifespan.

#### APPLICATION

- Park
- Square
- Trails
- Residential buildings
- Parking lot
- Bridges



#### SPECIFICATIONS

Model	Power	Lumen	Solar Panel	Charging Time
SXIMSFL01-25W3K	25 W	170 Lm/W	8W / 6V	5 Hrs
SXIMSFL01-25W6K	25 W	170 Lm/W	8W / 6V	5 Hrs
SXIMSF-01-60W6K	60 W	170 Lm/W	18W / 6V	6Hrs
SXIMSFL01100W6K	100 W	170 Lm/W	28W / 9V	5Hrs
SXIMSFL01200W3K	200 W	170 Lm/W	35W / 9V	4 Hrs
SXIMSFL01300W6K	300 W	170 Lm/W	35W / 9V	5 Hrs

#### OPTICAL DATA

Color Temperature (CCT)	3000K or 6000K
Beam Angle	110°
Type of Distribution	Direct Symmetrical
Life Span	50 000 H

#### PHYSICAL DATA


Finish	Grey
Protection Level - IP	IP65
Body Frame	Aluminium + ABS
Optical Material	Diffuser PC
Operation Temperature	0°C to +50°C

#### ELECTRICAL DATA


Control Remote Included	YES
Rechargeable battery	LiFePO4
RA	70
Dimmable	NO

#### DIMENSIONS

Model	Size (LxWxH)
SXIMSFL01-25W3K	163x50x185mm
SXIMSFL01-25W6K	163x50x185mm
SXIMSFL01-60W6K	204x55x237mm
SXIMSFL01100W6K	250x55x290mm
SXIMSFL01200W6K	250x55x290mm
SXIMSFL01300W6K	250x55x290mm



#### LUMINOUS INTENSITY DISTRIBUTION

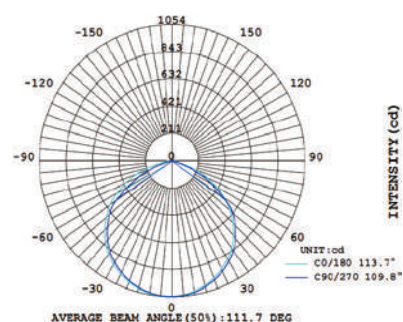

**THE MEASURE OF A PRO™**