

STANLEY

LED TRI-PROOF LIGHT

SXIMTRI03-PS-65K



Hermetic industrial luminaire, clipless design, smooth and elegant appearance, no need to open the diffuser to connect with safe and reliable protection level
Switchable power: 30W, 40W or 50W.

FEATURES

- UV protection
- Built in high luminous efficiency LED Chip and Driver
- IP65/IK08
- 3 Level Power Switchable
- Fast connection
- Light Efficiency: 100-118lm/ W

APPLICATION

- Industrial Areas
- Schools
- Sidewalks
- And Others
- Parks



LED



Multi Wattage Switchable



Eco Friendly

UV Protection



Easy Installation

OPTICAL DATA

Color Temperature (CCT)	6500K
Luminous Flux	3540,4280,5170 Lm
Beam Angle	120°
Type of Distribution	Direct Symmetrical
Opening Angle	80
Efficiency	100-118 Lm /W

PHYSICAL DATA

Finish	Gray & White
Protection Level - IP	IP65
Dimensions (LxWxH)	1200x70x56 mm
Type of Installation	Surface Mounted
Body Frame	PC
Optical Material	Diffuser PC
Operation Temperature	-20°C to +40°C

ELECTRICAL DATA

Input Power	30W, 40W, 50W
Power Switchable	YES
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Factor	>0.9
CRI	80
Dimmable	NO

DIMENSIONS



W - 70mm




H - 56mm



L - 1200mm




30W 40W 50W



Power Selectable Switch

LUMINOUS INTENSITY DISTRIBUTION

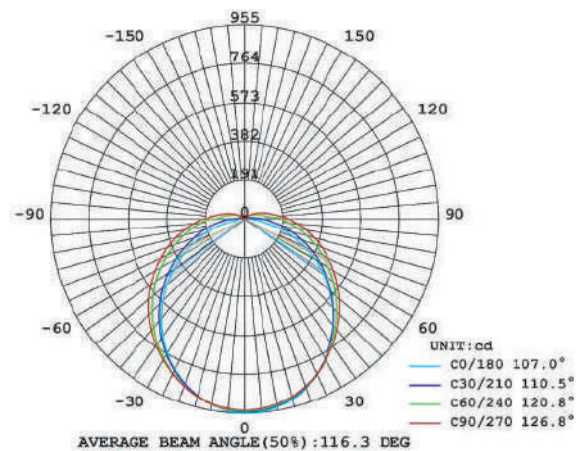

THE MEASURE OF A PRO™