

LED LINEAR LIGHT CCT

SXIML01- CCT



LED Linear luminaire, homogeneous light distribution without shadows, for a continuous, clean and simple lighting system. Modern and compact design with LED strip and opalized diffuser.

With 3 installation methods: Pendant, surface-mounted, or recessed/Trimless

FEATURES

- 3 Color Switchable Selection 3000K/4000K/6500K
- 1.5 Mt Pendant Kit Adjustable
- Ability to operate in cold conditions.
- Design flexibility.
- General lighting for limited build-in height.
- Instant lighting and the ability to withstand frequent switching.
- Interconnectable

APPLICATION

- Offices
- Commercial Areas
- Stores
- Educational Institutions



Multi Color Temperature (CCT)



Eco Friendly



3 Type of Installation

Hanging, Surface & Recessed

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6500K
Luminous Flux	2000 Lm or 4000 Lm
Beam Angle	110°
Type of Distribution	Direct Symmetrical
Efficiency	100 Lm/W


PHYSICAL DATA

Finish	Black/White
Protection Level - IP	IP20
Dimensions (20W)	600x50x70 mm
Dimensions (40W)	1200x50x70 mm
Type of Installation	3 Type of Installation
Body Frame	Aluminium
Optical Material	PMMA

ELECTRICAL DATA

Input Power	20W or 40W
Driver Type	Isolated Driver
Operating Voltage	100-277 V
Frequency	50-60 Hz
CRI	80
Operation Temperature	-20°C to +40°C


DIMENSIONS

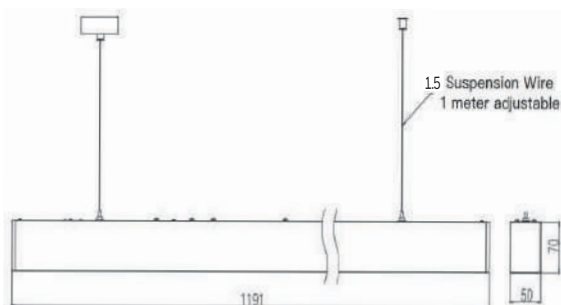

Select one of the following 3 installation methods :



Tri-Mount Options
Tres opciones de montaje



Hanging installation




Surface installation



Recessed installation



Seamless effect interconnectable





(CCT) Color Temperature Switch



3000K 4000K 6500K

ADDITIONAL INFORMATION

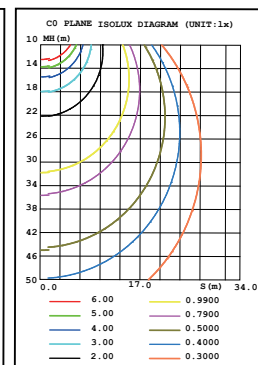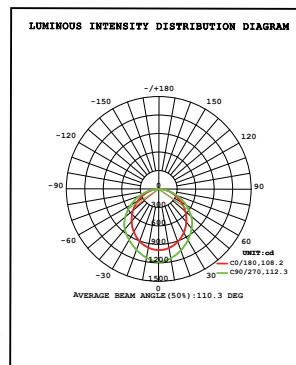

THE MEASURE OF A PRO™