

## LED LINEAR LIGHT CCT

### SXIML02-PSCCT



LED Linear luminaire, homogeneous light distribution without shadows, for a continuous, clean and simple lighting system. Modern and compact design with LED strip and opalized diffuser.  
With 3 installation methods: pendant, surface-mounted, or recessed/Trimless

#### FEATURES

- 3 Color Switchable Selection 3000K/4000K/6500K.
- 1.5 Mt Pendant Kit Adjustable.
- Ability to operate in cold conditions.
- Upper plug (**optional**) & play accessory for up light.
- General lighting for limited build-in height.
- Instant lighting and the ability to withstand frequent switching.

#### APPLICATION

- Offices
- Commercial Areas
- Stores
- Educational Institutions

Indoor



LED



Multi Color Temperature (CCT)



Eco Friendly



3 Type of Installation

Hanging, Surface & Recessed

#### OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6500K
Luminous Flux	100 Lm
Beam Angle	110°
Type of Distribution	Direct Symmetrical
Upper Plug ( <b>Optional</b> )	
Upper Light	16W
Down Light	24W


#### PHYSICAL DATA

Finish	Black/White
Protection Level - IP	IP20
Dimensions	1200x50x70 mm
Type of Installation	3 Type of Installation
Body Frame	Aluminium
Optical Material	PC


#### ELECTRICAL DATA

Input Power	40W
Driver Type	Isolated Driver
Operating Voltage	100-277 V
Frequency	50-60 Hz
CRI	80
Operation Temperature	-20°C to +40°C

#### DIMENSIONS

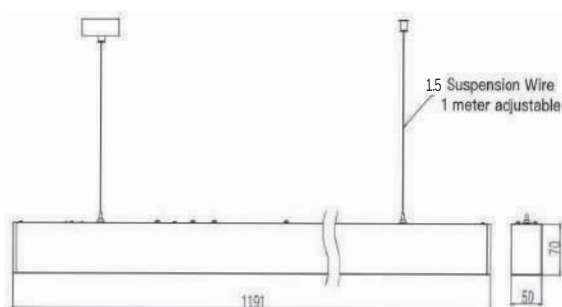


Select one of the following 3 installation methods :



(CCT) Color Temperature Switch



Tri-Mount Options  
Tres opciones de montaje



Hanging installation



Surface installation





Recessed installation



Seamless effect interconnectable

#### ADDITIONAL INFORMATION

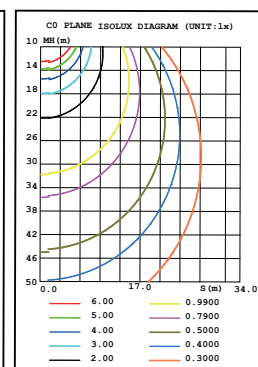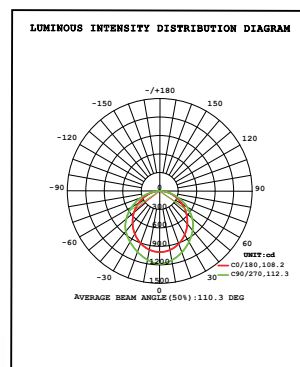

**THE MEASURE OF A PRO™**