

STANLEY®

LED TRI-PROOF LIGHT CCT

SXIMTRI01-18WCT/36WCT



High-performance waterproof LED tri-proof tube with PC + Aluminum housing. Designed for industrial and commercial environments requiring durability and efficiency.

FEATURES

- PC + Aluminum Waterproof Construction
- IP65 Protection
- 3CCT Selectable (3000K / 4000K / 6500K)
- Surface Mounted Installation
- High Durability for Industrial Use
- Corrosion Resistant Housing

APPLICATION

- Warehouses
- Parking Areas
- Industrial Facilities
- Commercial Buildings
- Humid Environments



LED

IP65



Easy Installation



Eco Friendly



Eco Friendly

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6500K
Beam Angle	120°
Type of Distribution	Direct Symmetrical
Luminous Flux	1800 lm (18W model) 3600 lm (36W model)

PHYSICAL DATA


Finish	White
Protection Level - IP/IK	IP65
Type of Installation	Ceiling Mountable
Body Frame	PC+Aluminum
Dimensions	0.6m (18W) 1.2m (36W)

ELECTRICAL DATA


Operating Voltage	100-277V
Frequency	50-60 Hz
Power Rating	> 0.50
CRI	80
Input Power	18W 36W

DIMENSIONS


SXIMTRI01-18WCT




SXIMTRI01-36WCT



(CCT) Color Temperature Switch



LUMINOUS INTENSITY DISTRIBUTION

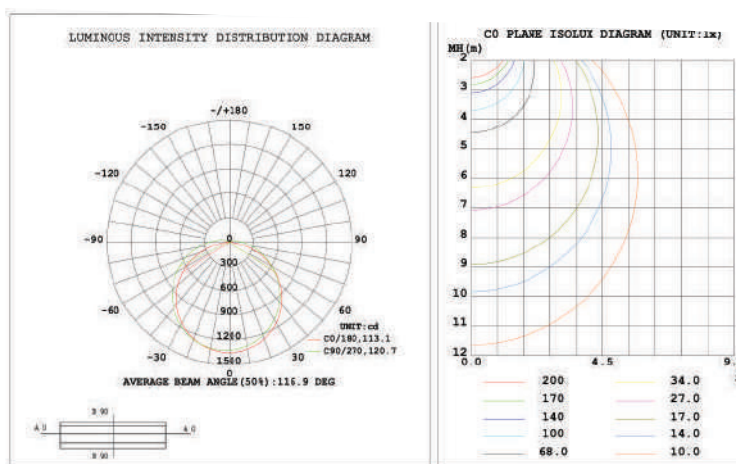

THE MEASURE OF A PRO™