

STANLEY

LED WALL LAMP

SXIMWP02-PSCCT



Two-Piece Die-Cast Aluminum Housing with Thermally Conductive LED Panel and Electrical Chamber

Tunable CCT for 4000K, 5000K, 6000K, Color Temperature Options

Anti-UV Prismatic Translucent Lens Designed to Shape the Light Distribution and Uniformity.

Mounting via J-box or Surface Conduit

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- 3 Level Power Switchable
- Fast connection
- IP65

APPLICATION

- Industrial Areas • Parks
- Sidewalks • Schools
- Squares • And others.

Indoor / Outdoor



LED



Multi Wattage Switchable



Multi Color Temperature (CCT)



Easy Installation



Water Proof

OPTICAL DATA

Color Temperature (CCT)	4000K, 5000K, 6000K
Luminous Flux	3750Lm, 5625Lm
	7500Lm, 10000Lm
Beam Angle	100°
Type of Distribution	Direct Symmetrical
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions	363x233x163mm
Type of Installation	Surface Mounted
Body Frame	Die-Cast Aluminium
Weight	2.05 Kg
Operation Temperature	-40°C to +50°C


ELECTRICAL DATA

Input Power	30W, 45W, 60W, 80W
Power Switchable	YES
Operating Voltage	120-277V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70

DIMENSIONS

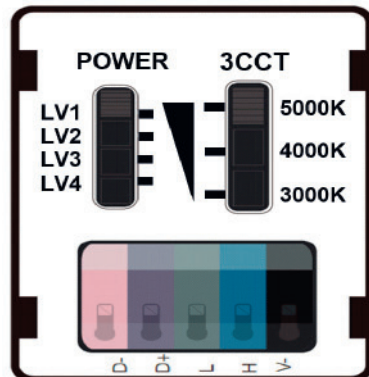

LUMINOUS INTENSITY DISTRIBUTION

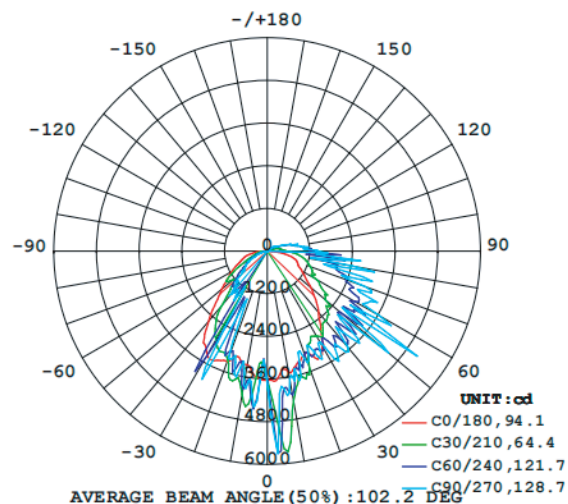

THE MEASURE OF A PRO™